



**Applications**

1. 90° corner connection with swivel range of ~30° to ~150°.
2. Suitable for circular driving with double sheet piles.

**Typical Properties**

Steel grade:	S 355 GP or higher*
Weight:	13,2 kg/m
Length:	10,0 m / 13,8 m / 16,0 m
Lth. tolerance:	+/- 200 mm
Thickness:	8 mm / 10 mm*

\* on request

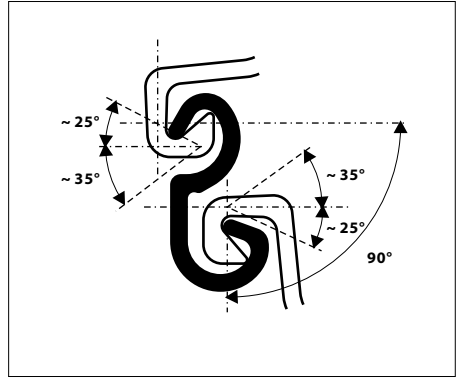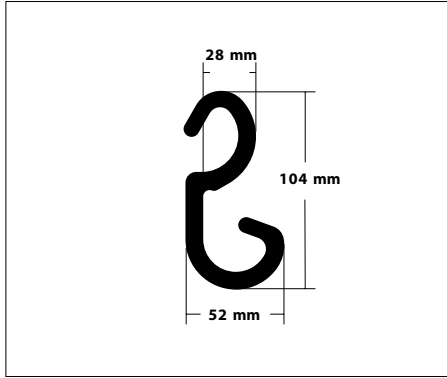

**Certificates**



**Installation Guidelines**

1. Please review proper interlocking examples as shown.
2. Thread the connector into the interlock while the sheet pile is out of the ground.
3. Adjust the connector to the appropriate position.
4. Tack or spot-weld the connector in place (typically a 100 mm weld attaching the connector to the sheet pile at the top is sufficient).
5. Drive/extract the sheet (with the connector attached) as you would normally.

